


FOR REVOLUTIONARY FINISHING AND SEMI-FINISHING STRATEGIES!

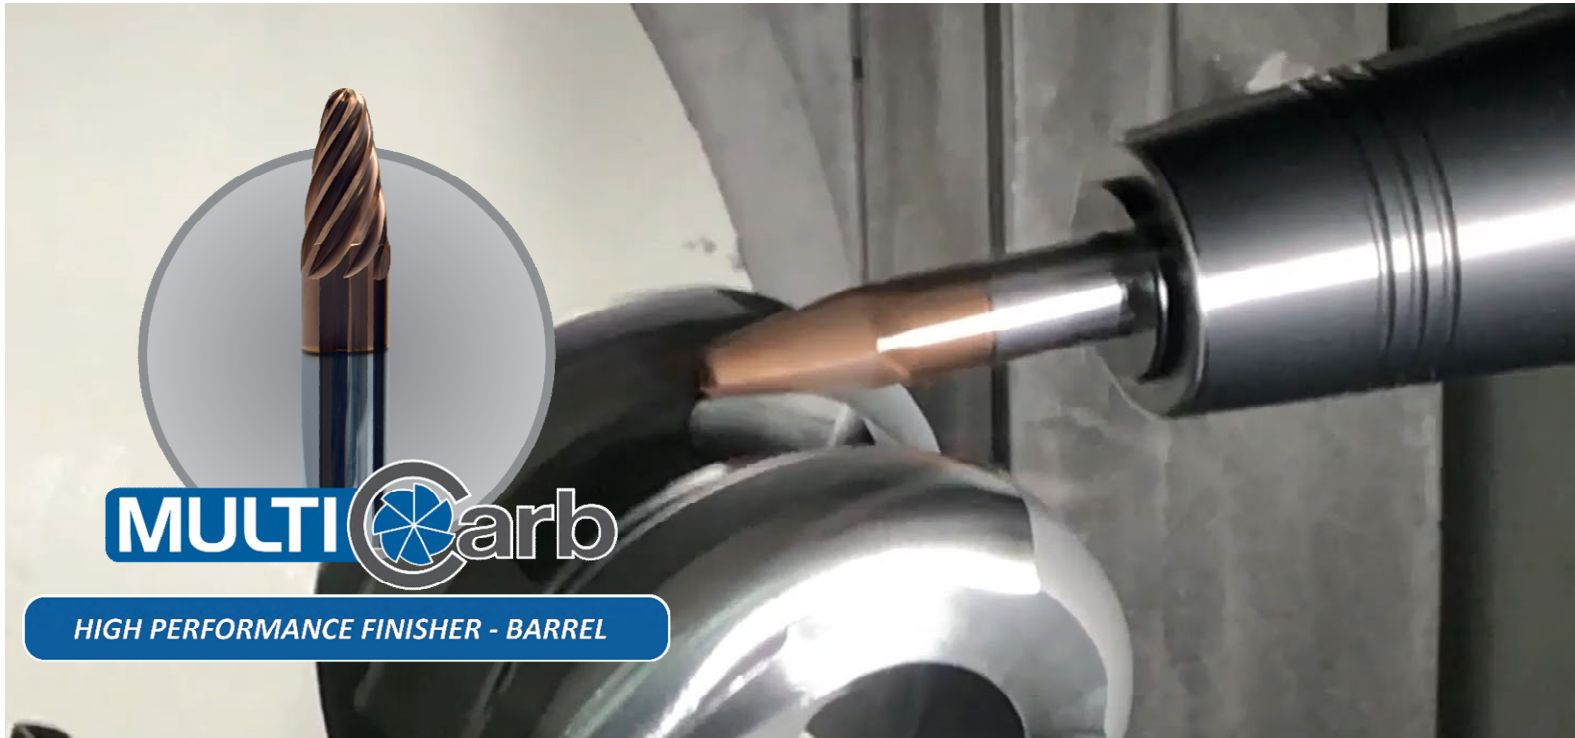

MULTI  **Carb**

HIGH PERFORMANCE FINISHER - BARREL

Brand	EDP	LIST PRICE	CUTTING DIAMETER	SHANK DIAMETER	OVERALL LENGTH	LENGTH OF CUT	SHANK LENGTH	COATING
MULTI-CARB	45700	\$118.40	0.2362	0.2362	2.2835	0.3740	1.9095	TH
MULTI-CARB	45701	\$113.70	6,0	6,0	58,0	8,0	50,0	TH
MULTI-CARB	45702	\$152.24	8,0	8,0	80,0	10,5	69,5	TH
MULTI-CARB	45703	\$147.53	8,0	8,0	80,0	9,5	70,5	TH
MULTI-CARB	45704	\$182.05	10,0	10,0	89,0	12,5	76,5	TH
MULTI-CARB	45705	\$177.35	10,0	10,0	89,0	11,5	77,5	TH
MULTI-CARB	45706	\$233.11	12,0	12,0	100,0	13,5	86,5	TH
MULTI-CARB	45707	\$237.81	12,0	12,0	100,0	14,4	85,6	TH
MULTI-CARB	45708	\$238.12	12,0	12,0	100,0	20,0	80,0	TH
MULTI-CARB	45709	\$285.84	16,0	16,0	109,0	31,0	78,0	TH
MULTI-CARB	45710	\$304.66	16,0	16,0	109,0	27,5	81,5	TH
MULTI-CARB	45711	\$299.95	16,0	16,0	109,0	24,0	85,0	TH
MULTI-CARB	45712	\$299.95	16,0	16,0	109,0	21,0	88,0	TH
MULTI-CARB	45713	\$295.25	16,0	16,0	109,0	18,5	90,5	TH
MULTI-CARB	45714	\$309.36	16,0	16,0	109,0	28,5	80,5	TH
MULTI-CARB	45715	\$299.95	16,0	16,0	109,0	19,0	90,0	TH
MULTI-CARB	45716	\$276.44	16,0	16,0	109,0	15,0	94,0	TH
MULTI-CARB	45717	\$295.25	16,0	16,0	109,0	18,5	90,5	TH



PATENT PENDING GEOMETRY : For chatter reduction enabling high feed rates allowing for multiple regrinds

TAPERED ANGLE LESS THAN 40° : For machining steep profiles

TI-NAMITE®-H COATING: This coating demonstrates a superior combination of hardness and adhesion in hard machining of molds and dies and machining high-alloy stainless steels for high temperature applications such as turbines.

FOR REVOLUTIONARY FINISHING AND SEMI-FINISHING STRATEGIES!



APF-B

ADVANCED PRODUCTIVITY FINISHER - BARREL

Brand	EDP	LIST PRICE	CUTTING DIAMETER	SHANK DIAMETER	OVERALL LENGTH	LENGTH OF CUT	SHANK LENGTH	COATING
S-Carb®	45718	\$118.40	6,0	6,0	58,0	9,5	48,5	TB
S-Carb®	45719	\$113.70	6,0	6,0	58,0	8,0	50,0	TB
S-Carb®	45720	\$152.24	8,0	8,0	80,0	10,5	69,5	TB
S-Carb®	45721	\$147.53	8,0	8,0	80,0	9,5	70,5	TB
S-Carb®	45722	\$182.05	10,0	10,0	89,0	12,5	76,5	TB
S-Carb®	45723	\$177.35	10,0	10,0	89,0	11,5	77,5	TB
S-Carb®	45724	\$233.11	12,0	12,0	100,0	13,5	86,5	TB
S-Carb®	45725	\$237.81	12,0	12,0	100,0	14,4	85,6	TB
S-Carb®	45726	\$238.12	12,0	12,0	100,0	20,0	80,0	TB
S-Carb®	45727	\$309.36	16,0	16,0	109,0	31,0	78,0	TB
S-Carb®	45728	\$299.95	16,0	16,0	109,0	27,5	81,5	TB
S-Carb®	45729	\$299.95	16,0	16,0	109,0	24,0	85,0	TB
S-Carb®	45730	\$299.95	16,0	16,0	109,0	21,0	88,0	TB
S-Carb®	45731	\$295.25	16,0	16,0	109,0	18,5	90,5	TB
S-Carb®	45732	\$304.66	16,0	16,0	109,0	28,5	80,5	TB
S-Carb®	45733	\$295.25	16,0	16,0	109,0	19,0	90,0	TB
S-Carb®	45734	\$276.44	16,0	16,0	109,0	15,0	94,0	TB
S-Carb®	45735	\$285.84	16,0	16,0	109,0	18,5	90,5	TB

PATENT PENDING GEOMETRY : For chatter reduction enabling high feed rates allowing for multiple regrinds

3-8 FLUTE DESIGN : To suit application and material

TI-NAMITE®-B COATING: This ceramic-based coating ensures a smooth surface and a low affinity to cold welding or edge build up, which makes it optimal for aluminum and copper applications. It has a high toughness and high hardness

